Ordering number:EN1413C

PNP/NPN Epitaxial Planar Silicon Transistors

2SA1371/2SC3468

High-Definition CRT Display, Video Output Applications

Use

· Color TV chroma output and high breakdown voltage driver.

Features

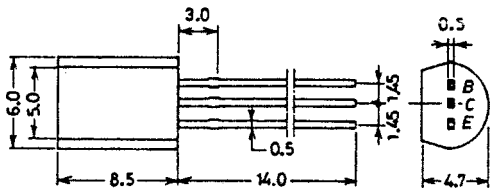
· High breakdown votage : V_{CEO}≥300V.
· Small reverse transfer capacitance and excellent high frequency characteristic
  : C_{re}=1.8pF (NPN), 2.3pF (PNP).
· Adoption of MBIT process.

Package Dimensions

unit:mm

2006A

[2SA1371/2SC3468]



EIAJ : SC-51
SANYO : MP

B : Base
C : Collector
E : Emitter

( ) : 2SA1371

Specifications

Absolute Maximum Ratings at Ta = 25˚C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		(–)300	V
Collector-to-Emitter Voltage	V_{CEO}		(–)300	V
Emitter-to-Base Voltage	V_{EBO}		(–)5	V
Collector Current	I_C		(–)100	mA
Collector Current (Pulse)	I_{CP}		(–)200	mA
Collector Dissipation	P_C		1.0	W
Junction Temperature	Tj		150	˚C
Storage Temperature	Tstg		–55 to +150	˚C

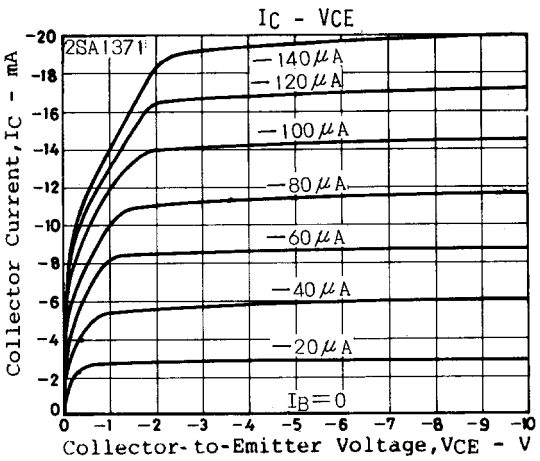
Electrical Characteristics at Ta = 25˚C

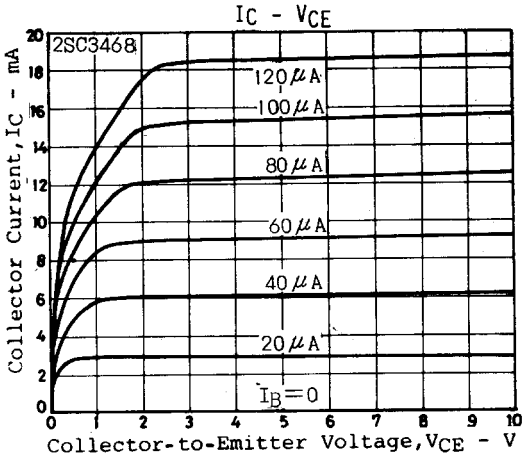
Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	V_{CB}=(–)200V, I_E=0			(–)0.1	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}=(–)4V, I_C=0			(–)0.1	μA
DC Current Gain	h_{FE}	V_{CE}=(–)10V, I_C=(–)10mA	40*		320*	
Gain-Bandwidth Product	f_T	V_{CE}=(–)30V, I_C=(–)10mA		150		MHz
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=(–)20mA, I_B=(–)2mA			(–)0.6	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C=(–)20mA, I_B=(–)2mA			(–)1.0	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C=(–)10μA, I_E=0	(–)300			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=(–)1mA, R_{BE}=∞	(–)300			V
Emitter-to-Base Breakdown Votage	$V_{(BR)EBO}$	I_E=(–)10μA, I_C=0	(–)5			V
Output Capacitance	C_{ob}	V_{CB}=(–)30V, f=1MHz		2.6		pF
				(3.1)		pF
Reverse Transfer Capacitance	C_{re}	VCB=(–)30V, f=1MHz		1.8		pF
				(2.3)		pF

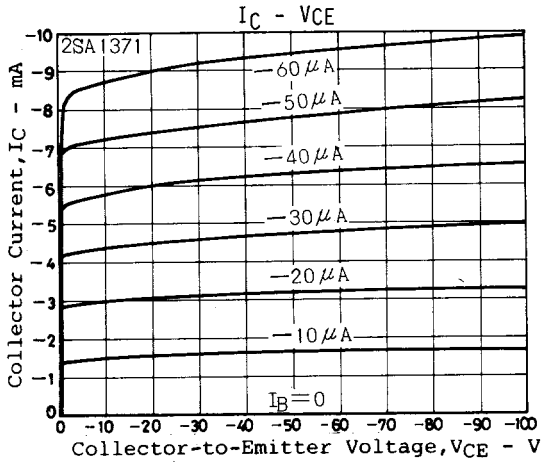
* : The 2SA1371/2SC3468 are classified by 10mA h_{FE} as follows :

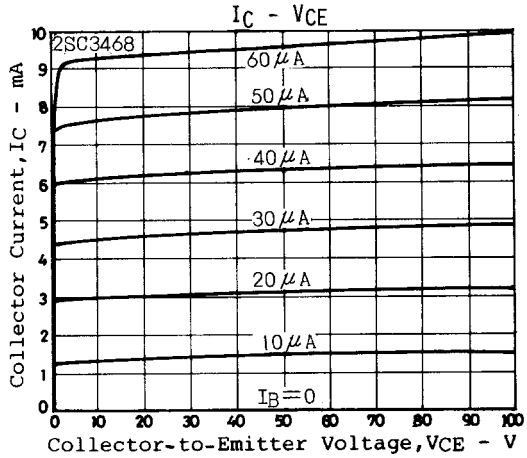
40	C	80	60	D	120	100	E	200	160	F	320

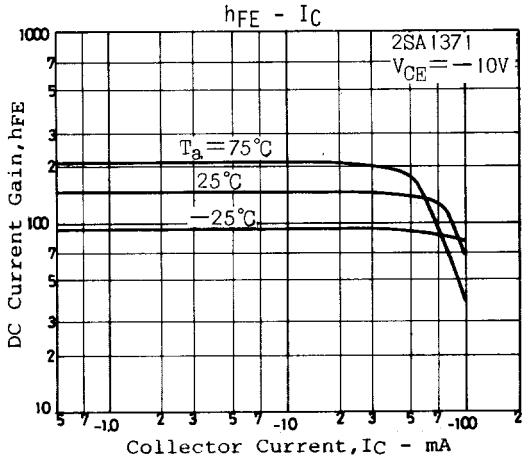
SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquaters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

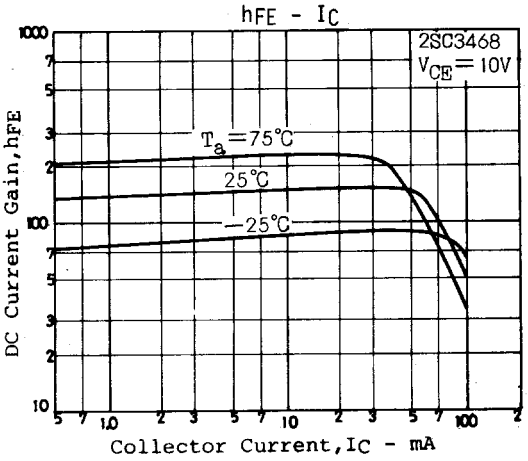

IC - VCE
2SA1371
−140μA
−120μA
−100μA
−80μA
−60μA
−40μA
−20μA
IB=0
Collector Current,IC - mA
Collector-to-Emitter Voltage,VCE - V

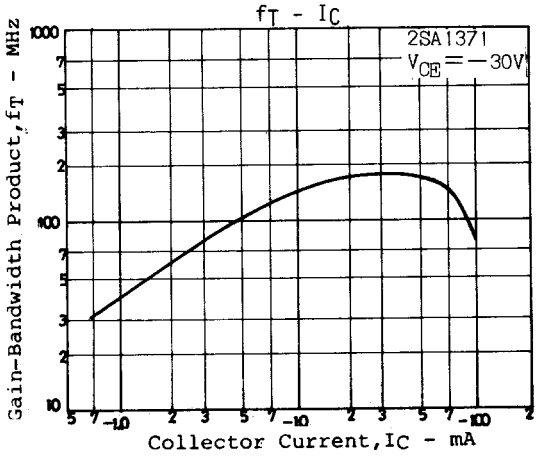

IC - VCE
2SC3468
120μA
100μA
80μA
60μA
40μA
20μA
IB=0
Collector Current,IC - mA
Collector-to-Emitter Voltage,VCE - V

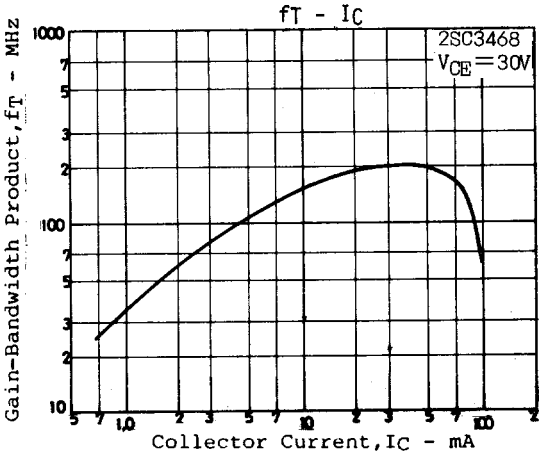

IC - VCE
2SA1371
−60μA
−50μA
−40μA
−30μA
−20μA
−10μA
IB=0
Collector Current,IC - mA
Collector-to-Emitter Voltage,VCE - V

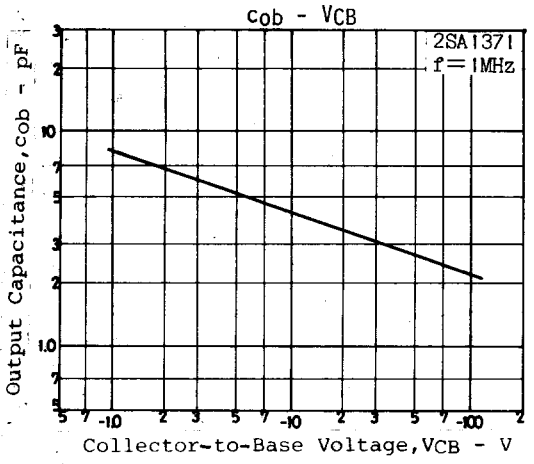

IC - VCE
2SC3468
60μA
50μA
40μA
30μA
20μA
10μA
IB=0
Collector Current,IC - mA
Collector-to-Emitter Voltage,VCE - V

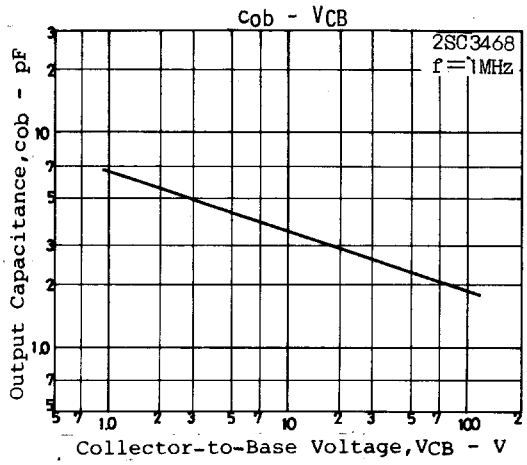

hFE - IC
2SA1371
VCE=−10V
Ta=75°C
25°C
−25°C
DC Current Gain,hFE
Collector Current,IC - mA

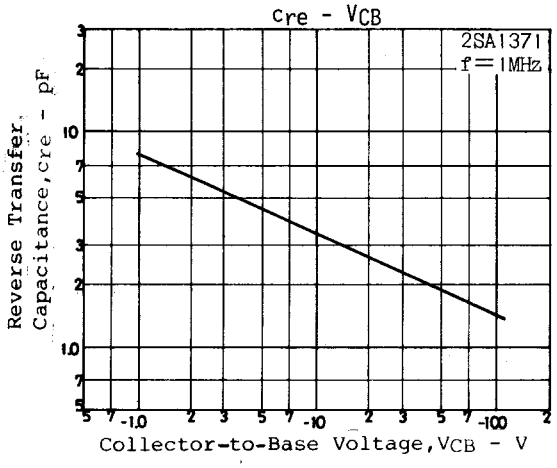

hFE - IC
2SC3468
VCE=10V
Ta=75°C
25°C
−25°C
DC Current Gain,hFE
Collector Current,IC - mA

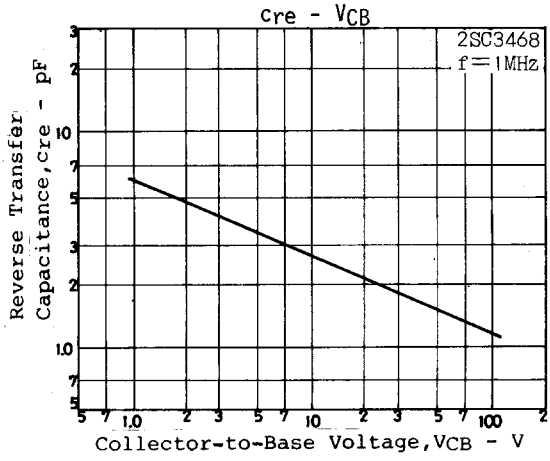

fT - IC
2SA1371
VCE=−30V
Gain-Bandwidth Product,fT - MHz
Collector Current,IC - mA

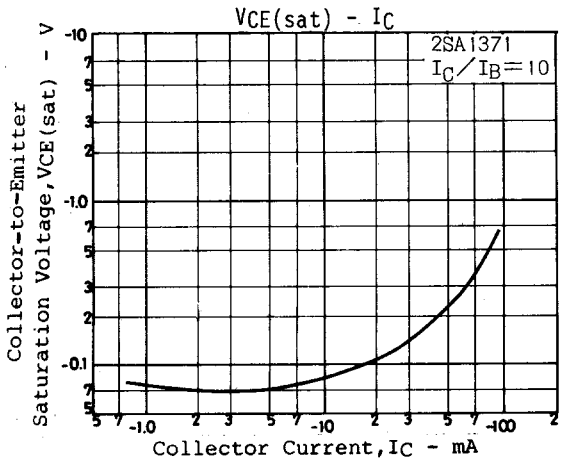

fT - IC
2SC3468
VCE=30V
Gain-Bandwidth Product,fT - MHz
Collector Current,IC - mA

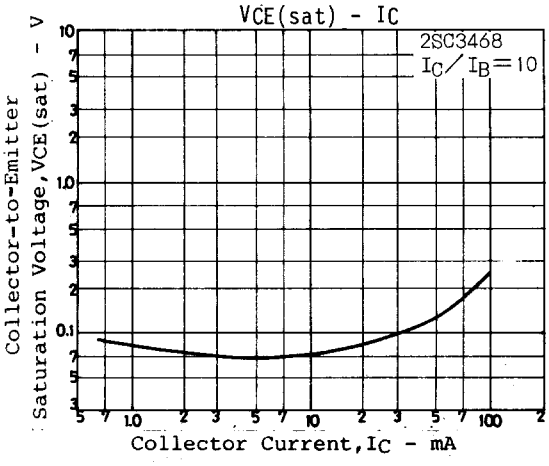

Cob - VCB
2SA1371
f=1MHz
Output Capacitance,Cob - pF
Collector-to-Base Voltage,VCB - V

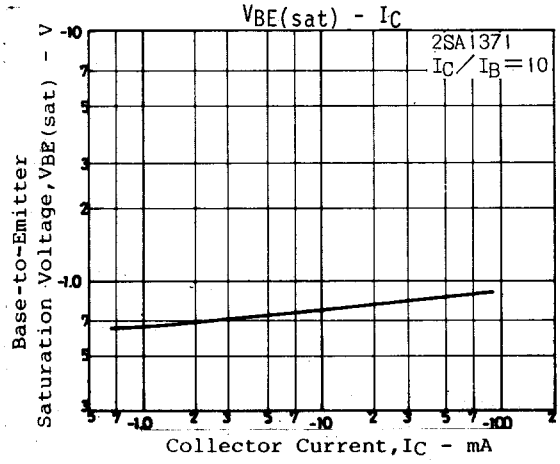

Cob - VCB
2SC3468
f=1MHz
Output Capacitance,Cob - pF
Collector-to-Base Voltage,VCB - V

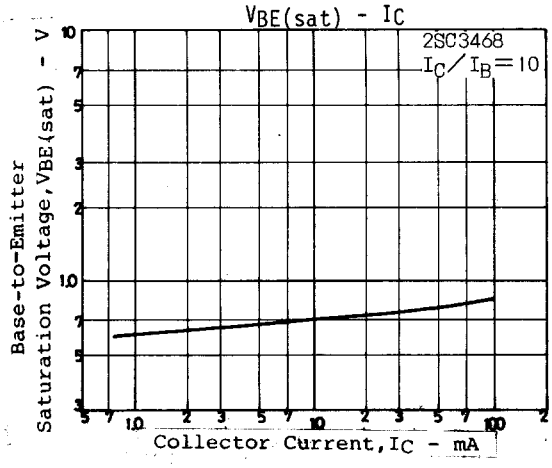

Cre - VCB
2SA1371
f=1MHz
Reverse Transfer Capacitance,Cre - pF
Collector-to-Base Voltage,VCB - V

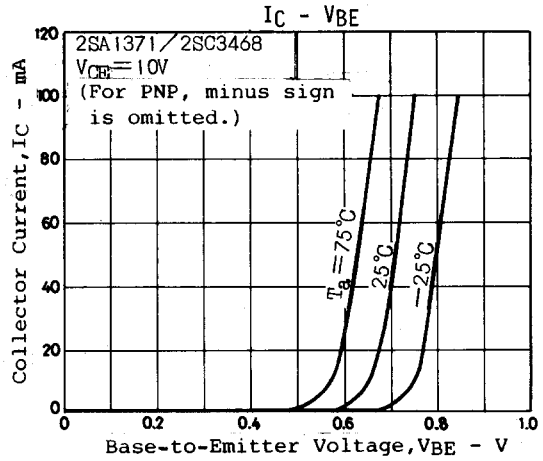

Cre - VCB
2SC3468
f=1MHz
Reverse Transfer Capacitance,Cre - pF
Collector-to-Base Voltage,VCB - V

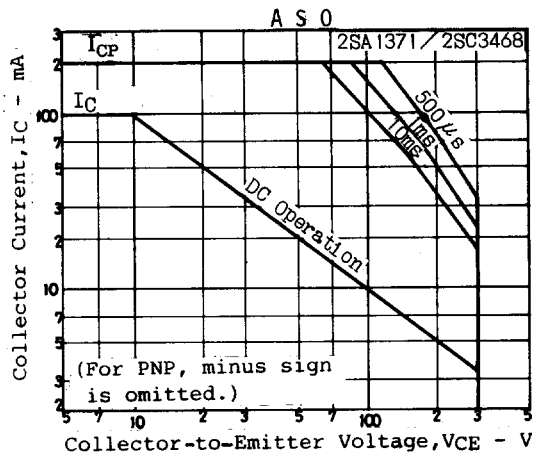

VCE(sat) - IC
2SA1371
IC/IB=10
Collector-to-Emitter Saturation Voltage,VCE(sat) - V
Collector Current,IC - mA

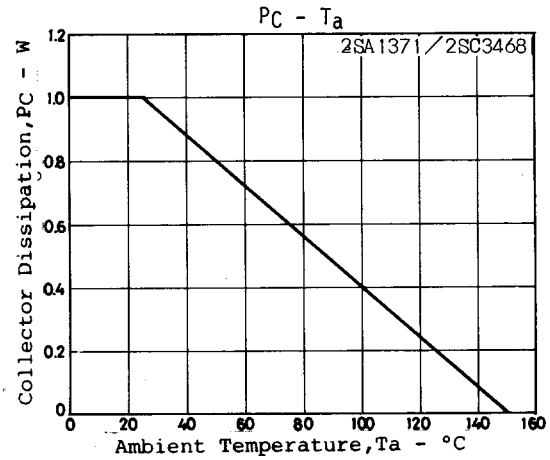

VCE(sat) - IC
2SC3468
IC/IB=10
Collector-to-Emitter Saturation Voltage,VCE(sat) - V
Collector Current,IC - mA


VBE(sat) - IC
2SA1371
IC/IB=10
Base-to-Emitter Saturation Voltage,VBE(sat) - V
Collector Current,IC - mA


VBE(sat) - IC
2SC3468
IC/IB=10
Base-to-Emitter Saturation Voltage,VBE(sat) - V
Collector Current,IC - mA







■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.