isc N-Channel MOSFET Transistor 2SK955

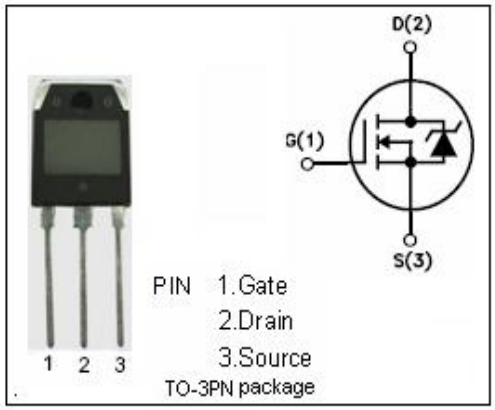

DESCRIPTION

- Drain Current $-I_D$=5A@ T_C=25℃
- Drain Source Voltage-
  : V_{DSS}=800V(Min)
- Fast Switching Speed

APPLICATIONS

- Designed especially for high voltage,high speed applications, such as off-line switching power supplies , UPS,AC and DC motor controls,relay and solenoid drivers.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage (V_{GS}=0)	800	V
V_{GS}	Gate-Source Voltage	±20	V
I_D	Drain Current-continuous@ TC=25℃	5	A
P_{tot}	Total Dissipation@TC=25℃	125	W
T_j	Max. Operating Junction Temperature	80	℃
T_{stg}	Storage Temperature Range	-55~150	℃

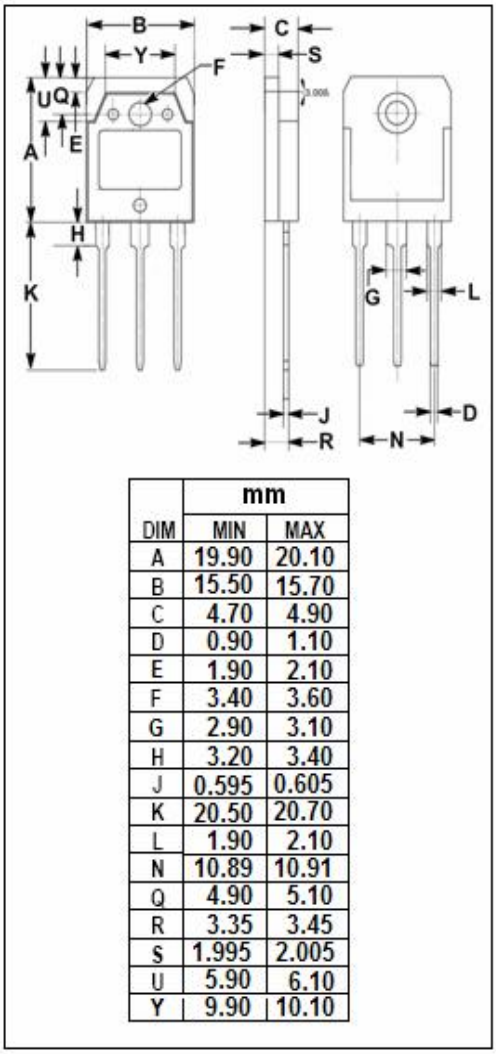

DIM	mm MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.10
H	3.20	3.40
J	0.595	0.605
K	20.50	20.70
L	1.90	2.10
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

PDF pdfFactory Pro www.fineprint.cn

isc N-Channel Mosfet Transistor 2SK955

• **ELECTRICAL CHARACTERISTICS (T_C=25℃)**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0; I_D= 10mA	800			V
$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS}= V_{GS}; I_D= 10mA	2.1	3.0	4.0	V
$R_{DS(ON)}$	Drain-Source On-stage Resistance	V_{GS}= 10V; I_D=2.5A		1.5	2.0	Ω
I_{GSS}	Gate Source Leakage Current	V_{GS}= ±20V; V_{DS}= 0			±100	nA
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=800V; V_{GS}= 0			500	uA
ton	Turn-on time	V_{GS}=10V;I_D=2.5A; R_L=50Ω		110	170	ns
toff	Turn-off time			420	530	ns
V_{SD}	Diode Forward Voltage	I_F=5A; V_{GS}=0		1.0	1.5	V

PDF pdfFactory Pro www.fineprint.cn