SPECIFICATION

DEVICE NAME : Power MOSFET

TYPE NAME : 2SK2771-01R

SPEC. No. :

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED
DRAWN			
CHECKED			

Fuji Electric Co.,Ltd.

DWG.NO.

Y 0257-R-004a

1. Scope
This specifies Fuji power MOSFET 2SK2771-01R

2. Construction N-channel enhancement mode power MOSFET

3. Application for switching

4. Outview TO-3PF Outview See to 5/11 page

5. Absolute maximum ratings at Tc=25℃ (unless otherwise specified)

Description	Symbol	Characteristics	Unit	Remarks
Drain-source voltage	V_{DS}	900	V	
Drain-gate voltage	V_{DGR}	900	V	R_{GS}= 2 0 KΩ
Continuous Drain current	I_D	± 9	A	
Pulsed drain current	I_{Dpulse}	± 36	A	
Gate-source voltage	V_{GS}	± 30	V	
Maximum power dissipation	P_D	100	W	
Operating and storage temperature range	T_{ch}	150	℃	
	T_{stg}	-55 ～ +150	℃	

6. Electrical characteristics at Tc=25℃ (unless otherwise specified)
Static ratings

Description	Symbol	Conditions		Characteristics			Unit
				Min.	Typ.	Max.	
Drain-source breakdown voltage	BV_{DSS}	I_D =1mA V_{GS}=0V		900			V
Gate threshold voltage	$V_{GS(th)}$	I_D =1mA V_{DS}=V_{GS}		2.5	3.0	3.5	V
Zero gate voltage drain current	I_{DSS}	V_{DS}=900V V_{GS}= 0V	T_{ch}= 25℃		10	500	μA
	I_{DSS}		T_{ch}=125℃		0.2	1.0	mA
Gate-source leakage current	I_{GSS}	V_{GS}=±30V V_{DS}= 0V			10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	I_D =4.5A V_{GS}=10 V			1.1	1.4	Ω

Dynamic ratings

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Forward transconductance	gfs	I_D =4.5A V_{DS}=25 V	5	10		S
Input capacitance	Ciss	V_{DS}=25V V_{GS}= 0V f =1MHz		2200	3300	pF
Output capacitance	Coss			210	320	pF
Reverse transfer capacitance	Crss			65	100	pF
Turn-on time	td(on)	V_{CC}=600V V_{GS}= 10V I_D = 9A R_{GS}= 10Ω		25	40	ns
	tr			60	90	ns
Turn-off time	td(off)			140	210	ns
	tf			70	110	ns

Reverse diode

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Avalanche capability	I_{AV}	L= 100μH, T_{ch}= 25℃ * see Fig1 and Fig2	9			A
Diode forward on-voltage	V_{SD}	I_F = 2 × I_{DR} V_{GS}=0V, T_{ch}= 25℃		1.2	1.8	V
Reverse recovery time	t_{rr}	I_F = I_{DR} V_{GS}=0V $-dI_F/dt$=100A/μs T_{ch}= 25℃		450		ns
Reverse recovery charge	Q_{rr}			4		μC

7. Thermal resistance

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	Rth_{ch}-c				1.25	℃/W
	Rth_{ch}-a				30.0	℃/W

Fig. 1 Test circuit



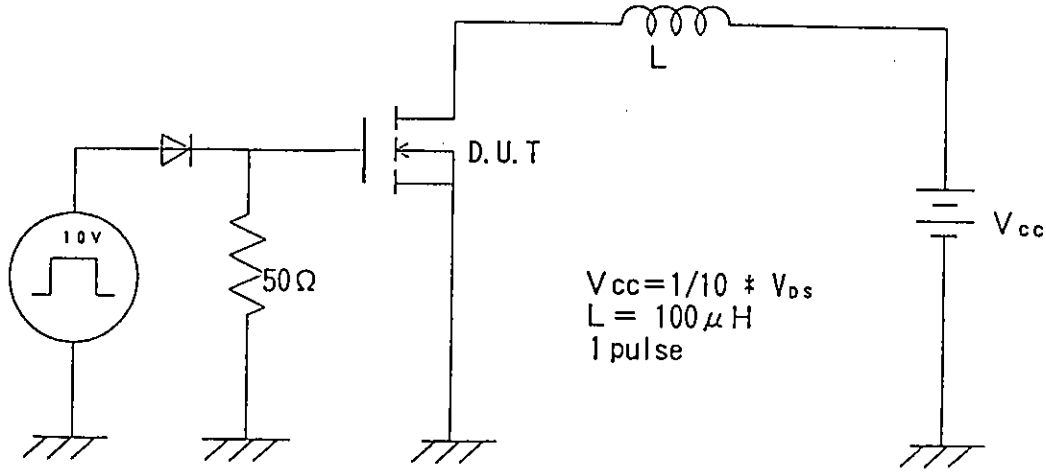


Fig. 2 Operating waveforms

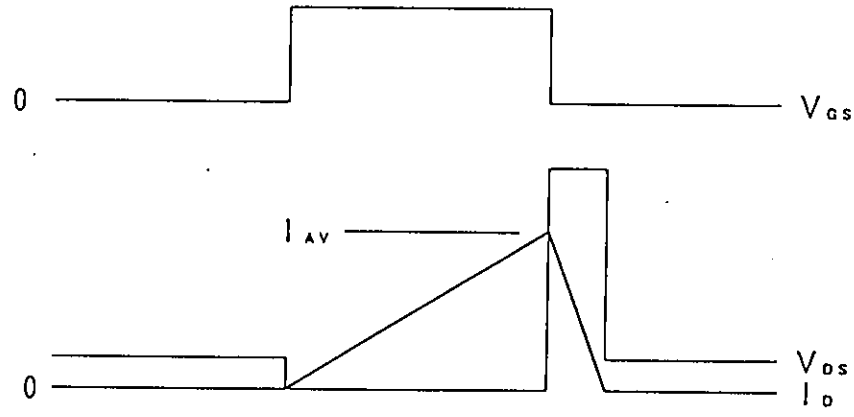

FUJI POWER MOSFET

TYPE : 2SK2771-01R

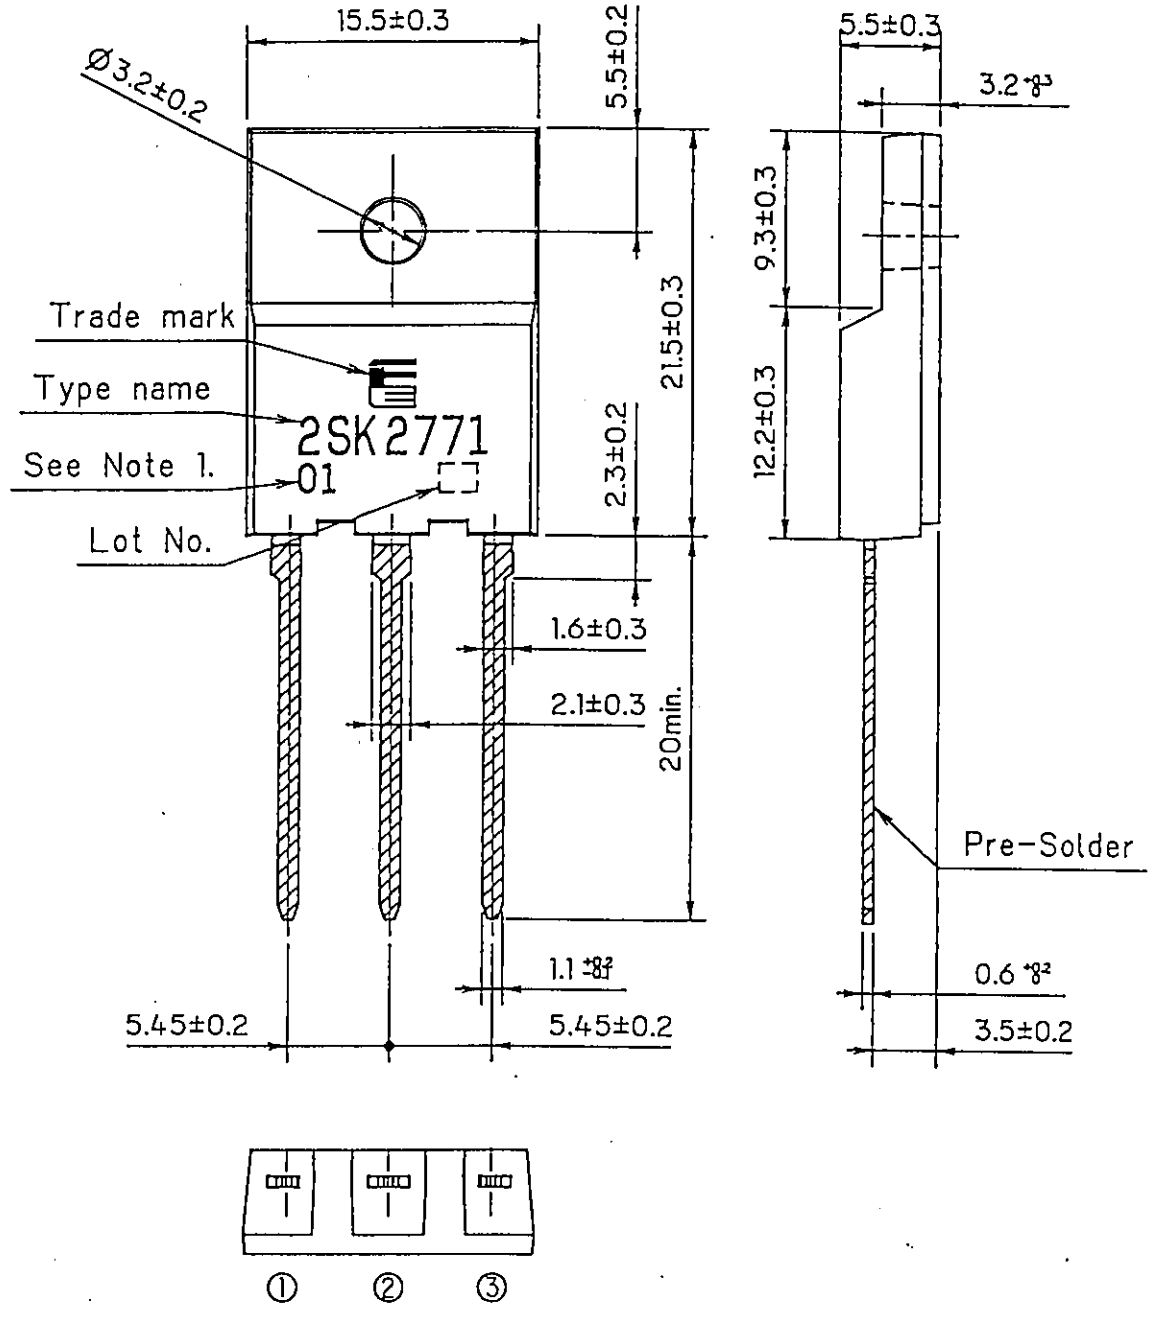

CONNECTION


① GATE
② DRAIN
③ SOURCE

Note 1. Guaranteed mark of avalanche ruggedness.


DIMENSIONS ARE IN MILLIMETERS.

Fuji Electric Co.,Ltd.	DWG.NO.	5/11


Power Dissipation
PD=f(Tc)

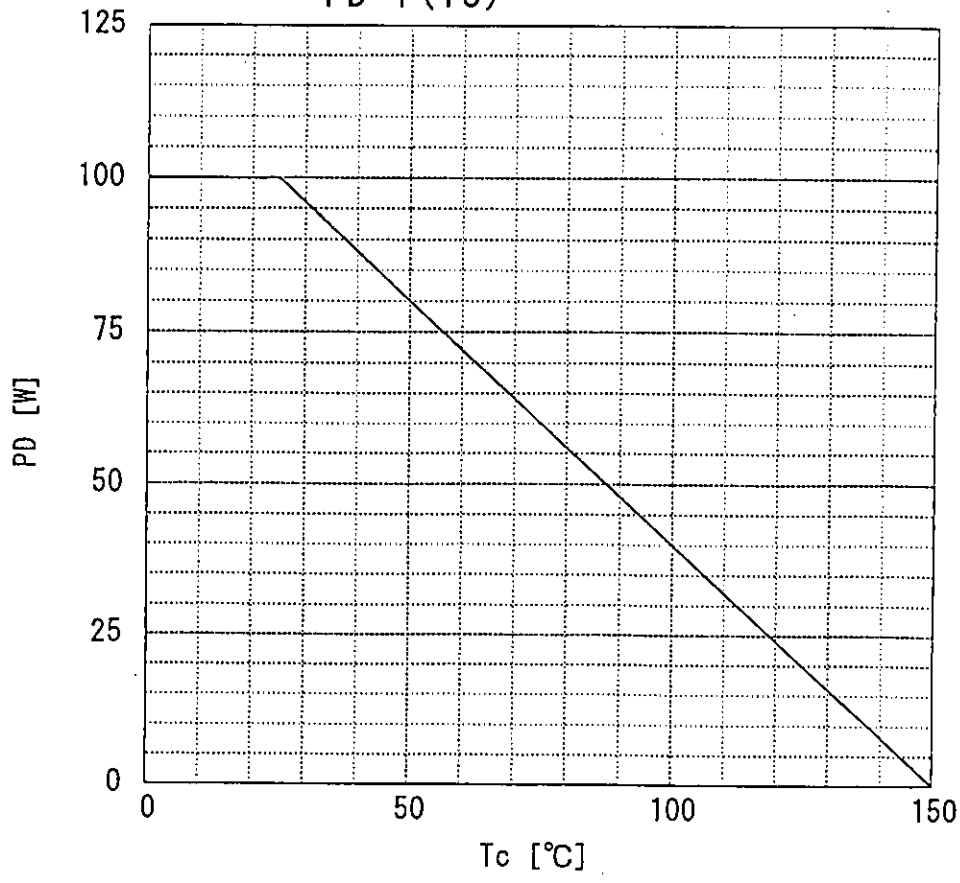


Safe operating area
ID=f(VDS) : D=0.01, Tc=25℃

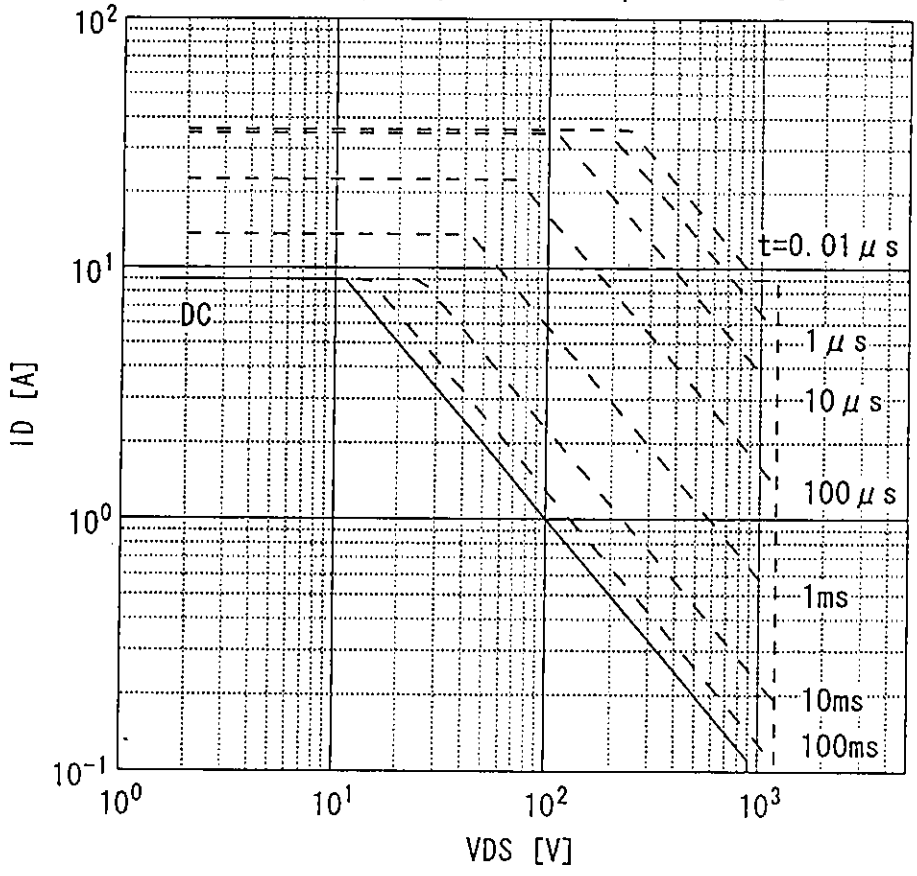


Typical output characteristics
ID=f(VDS):80μs pulse test,Tch=25°C

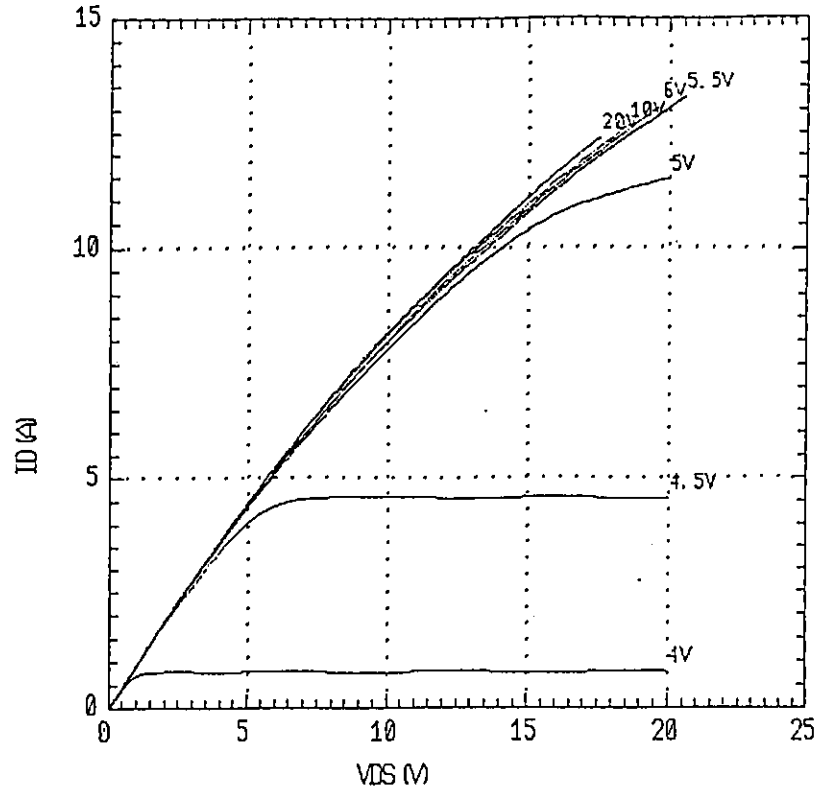


Typical Transfer Characteristics
ID=f(VGS):80μs pulse test,VDS=25V,Tch=25°C

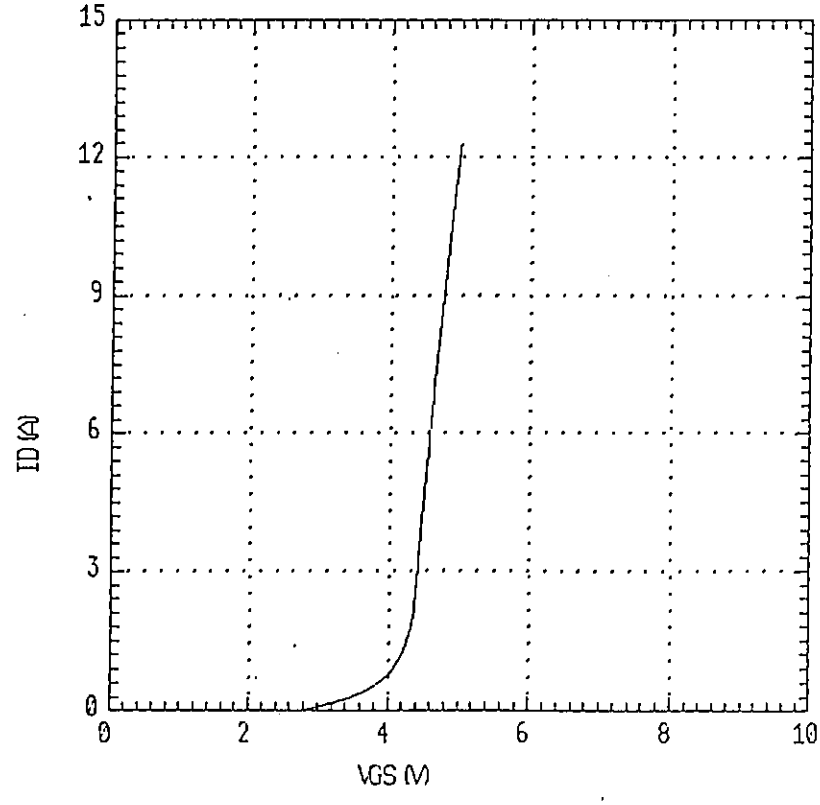


Typical Transconductance
gfs=f(ID):80μs pulse test, VDS=25V, Tch=25°C

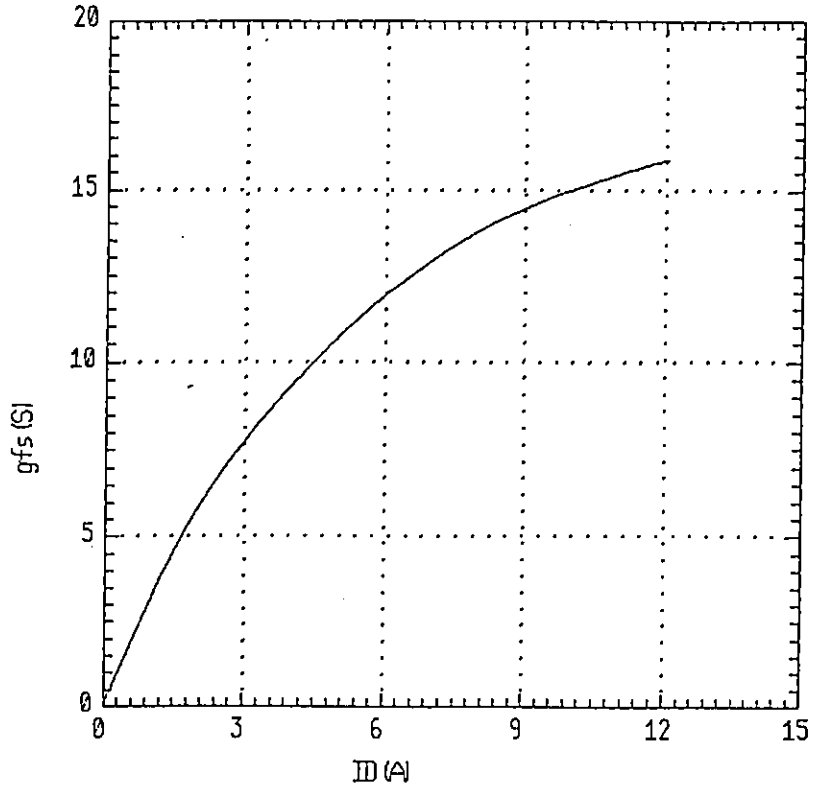


Typical Drain-source on-state resistance
RDS(on)=f(ID):80μs pulse test, Tch=25°C

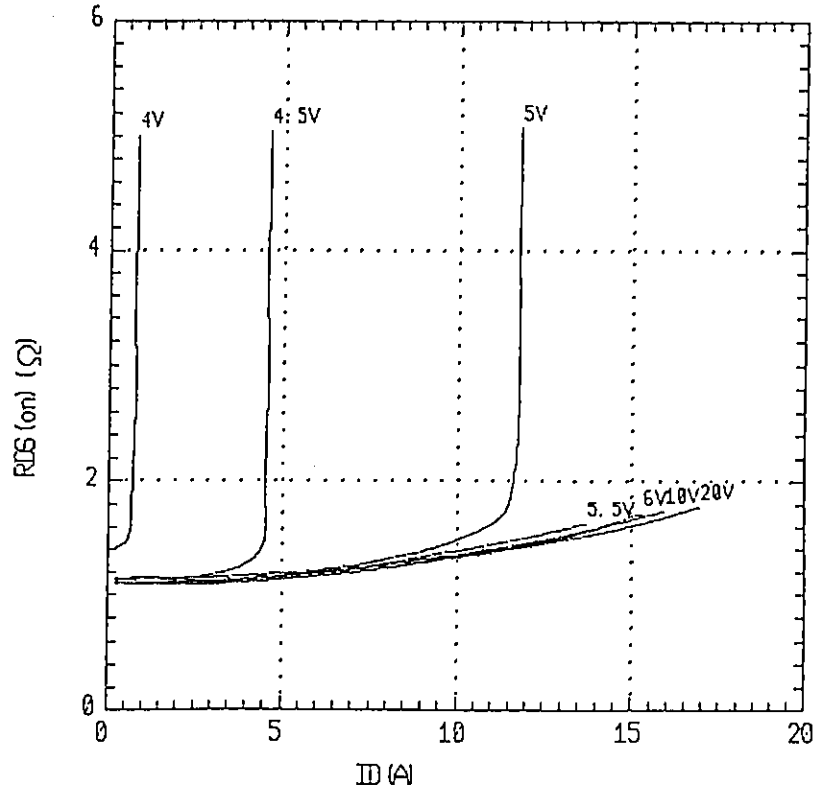


Drain-source on-state resistance
RDS(on)=f(Tch):ID=4.5A,VGS=10V

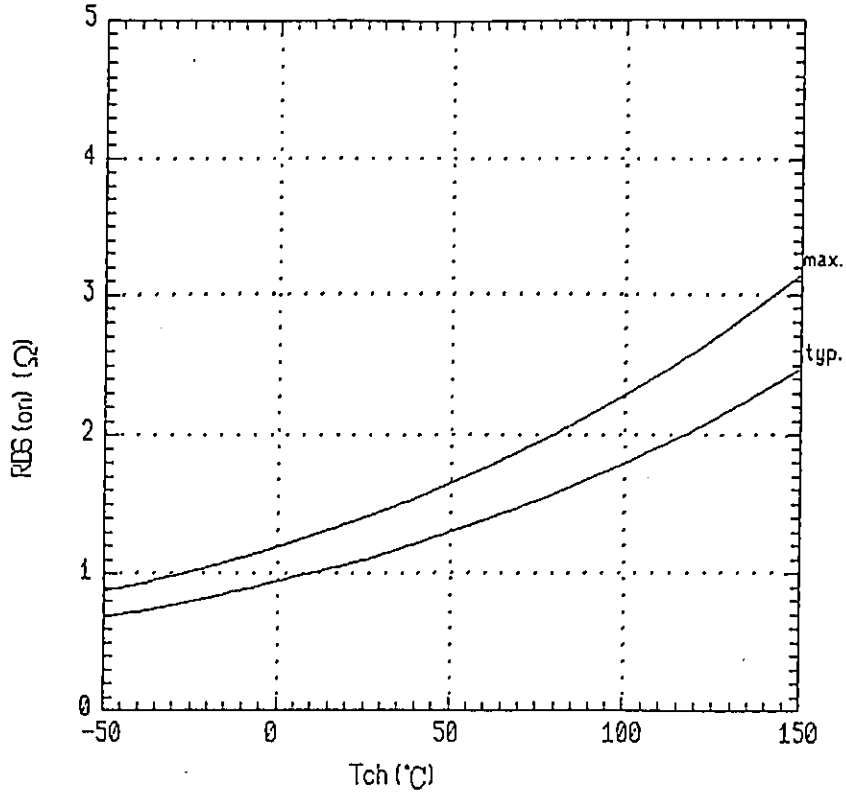


Gate threshold voltage
VGS(th)=f(Tch):VDS=VGS,ID=1mA

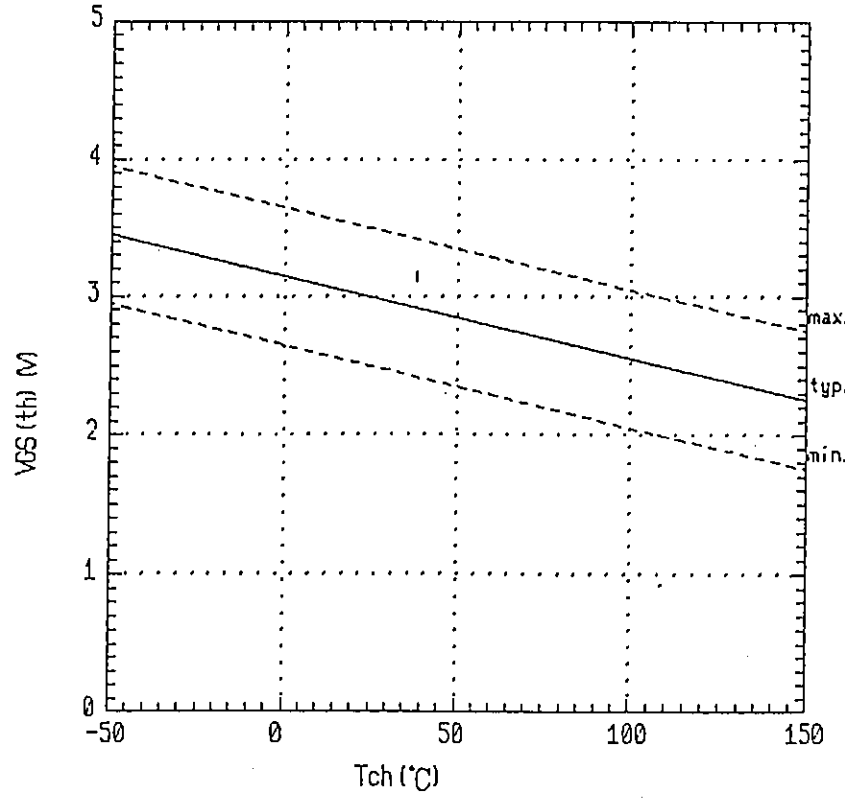


Typical gate charge characteristics
VGS=f(Qg):ID=9A

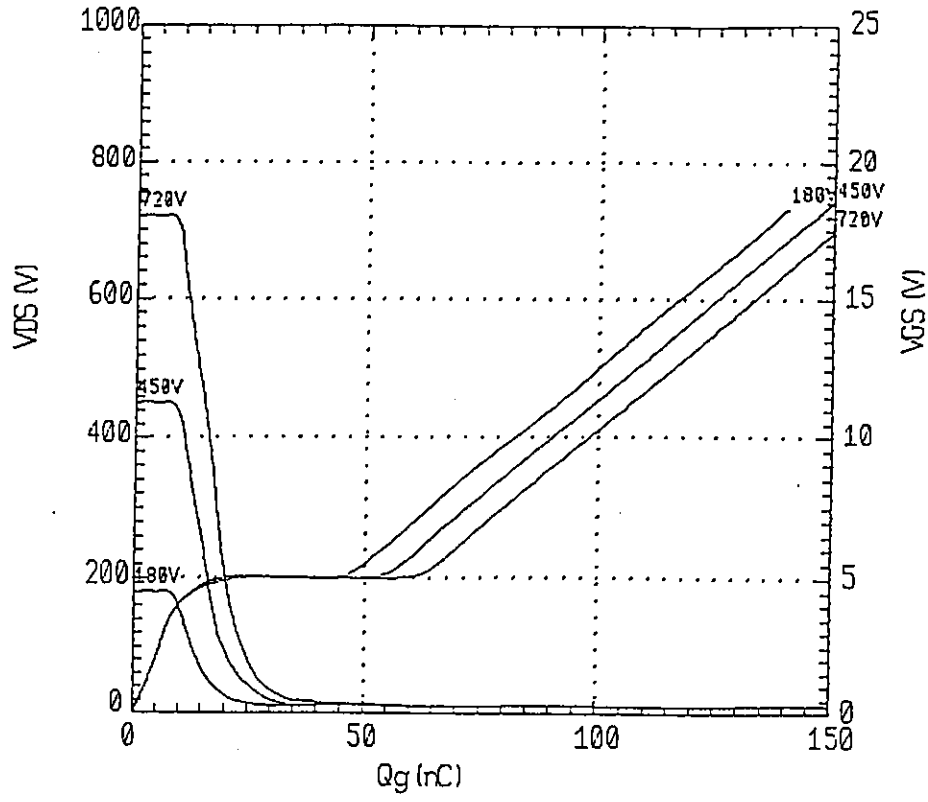


Typical capacitances
C=f(VDS):VGS=0V, f=1MHz

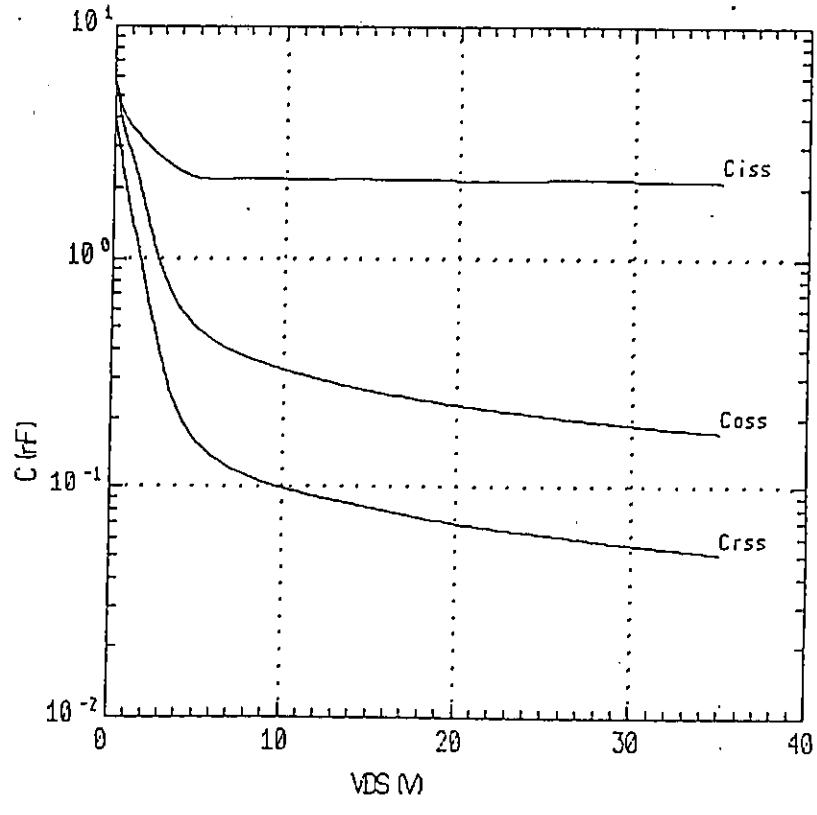

Farward characteristic of revese diode
IF=f(VSD):80μs pulse test

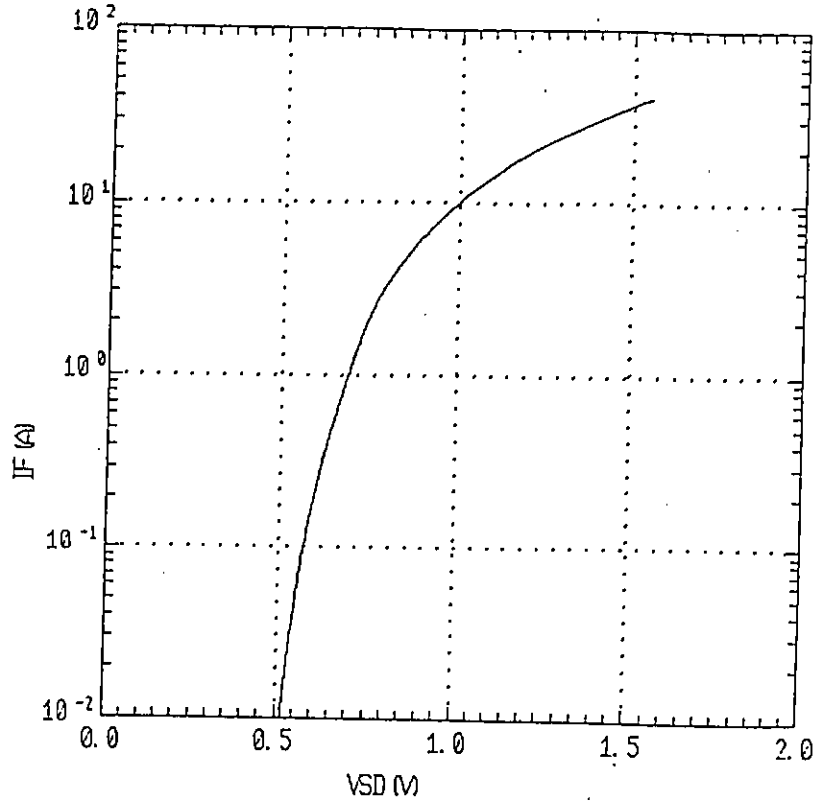

Transient thermal impedande
Zthch=f(t) parameter:D=t/T

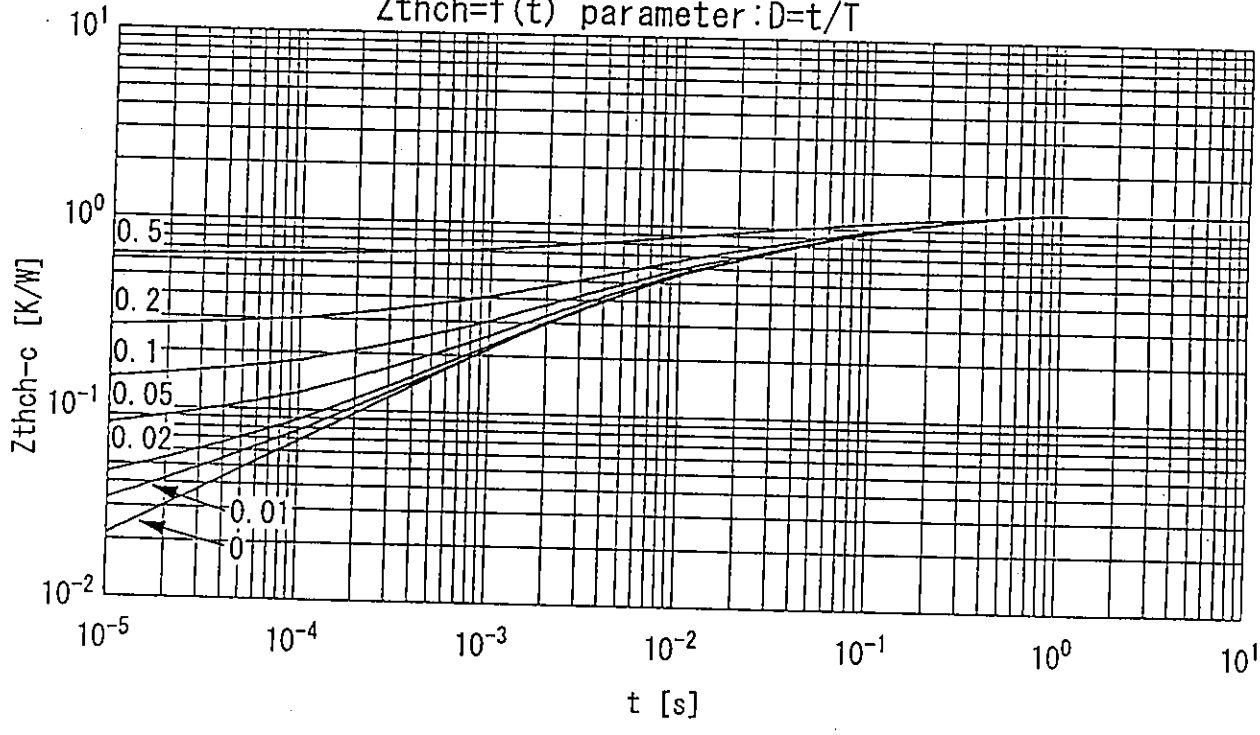

Fuji Electric Co.,Ltd.	DWG.NO.	11/11

Y 0257-R-003a