www.DataSheet4U.com

GENERAL SEMICONDUCTOR®

GFB75N03

N-Channel Enhancement-Mode MOSFET

V_{DS} 30V $R_{DS(ON)}$ 6.5mΩ I_D 80A



TRENCH GENFET®

New Product



TO-263AB

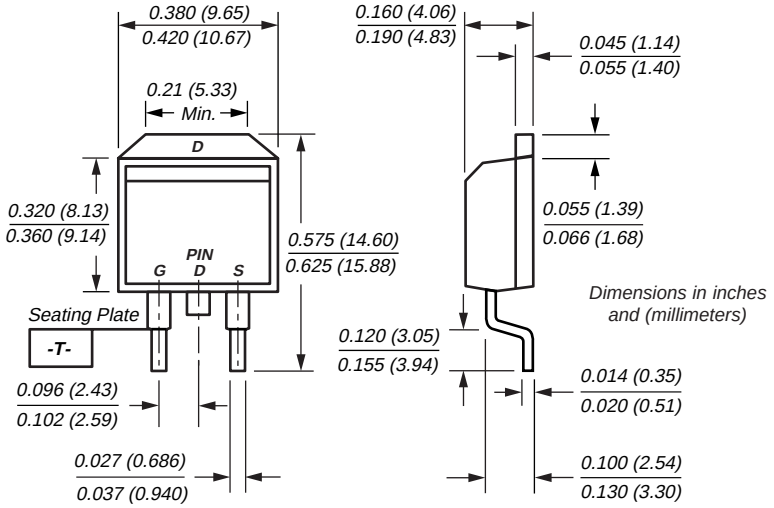

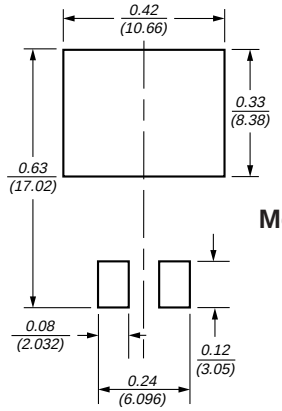

Mounting Pad Layout

Mechanical Data

Case: JEDEC TO-263 molded plastic body

Terminals: Leads solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250°C/10 seconds at terminals

Mounting Position: Any **Weight:** 1.3g

Features

- Advanced Trench Process Technology
- High Density Cell Design for Ultra Low On-Resistance
- Specially Designed for Low Voltage DC/DC Converters
- Fast Switching for High Efficiency

Maximum Ratings and Thermal Characteristics (T_C = 25°C unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current(1)		I_D	80	A
Pulsed Drain Current		I_{DM}	240	
Maximum Power Dissipation	T_A = 25°C T_A = 100°C	P_D	69.4 27.8	W
Operating Junction and Storage Temperature Range		T_J, T_{stg}	–55 to 150	°C
Lead Temperature (1/8" from case for 5 sec.)		T_L	275	°C
Junction-to-Case Thermal Resistance		$R_{\theta JC}$	1.8	°C/W
Junction-to-Ambient Thermal Resistance(2)		$R_{\theta JA}$	40	°C/W

Notes: (1) Maximum DC current limited by the package
(2) 1-in^2 2oz. Cu PCB mounted

5/1/01

www.DataSheet4U.com

www.DataSheet4U.com

GENERAL SEMICONDUCTOR®

GFB75N03

N-Channel Enhancement-Mode MOSFET

Electrical Characteristics (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS} = 0V, I_D = 250µA	30	–	–	V
Drain-Source On-State Resistance(1)	$R_{DS(on)}$	V_{GS} = 10V, I_D = 38A	–	5.8	6.5	mΩ
		V_{GS} = 4.5V, I_D = 31A	–	8.5	9.5	
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250µA	1.0	–	3.0	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 30V, V_{GS} = 0V	–	–	1.0	µA
Gate-Body Leakage	I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V	–	–	±100	nA
On-State Drain Current(1)	$I_{D(on)}$	V_{DS} ≥ 5V, V_{GS} = 10V	75	–	–	A
Forward Transconductance(1)	g_{fs}	V_{DS} = 15V, I_D = 38A	–	61	–	S
Dynamic						
Total Gate Charge	Q_g	V_{DS}=15V, I_D=38A, V_{GS}=5V	–	32.5	46	nC
		V_{DS} = 15V, V_{GS} = 10V, I_D = 38A	–	63	90	
Gate-Source Charge	Q_{gs}		–	11	–	
Gate-Drain Charge	Q_{gd}		–	11	–	
Turn-On Delay Time	$t_{d(on)}$	V_{DD} = 15V, R_L = 15Ω, I_D ≅ 1A, V_{GEN} = 10V, R_G = 6Ω	–	13	26	ns
Turn-On Rise Time	t_r		–	16	29	
Turn-Off Delay Time	$t_{d(off)}$		–	94	132	
Turn-Off Fall Time	t_f		–	38	57	
Input Capacitance	C_{iss}	V_{DS} = 15V, V_{GS} = 0V, f = 1.0MHz	–	3240	–	pF
Output Capacitance	C_{oss}		–	625	–	
Reverse Transfer Capacitance	C_{rss}		–	285	–	
Source-Drain Diode						
Max. Diode Forward Current	I_S	–	–	–	75	A
Diode Forward Voltage	V_{SD}	I_S = 38A, V_{GS} = 0V	–	0.9	1.3	V

Note:
(1) Pulse test; pulse width ≤ 300 µs, duty cycle ≤ 2%

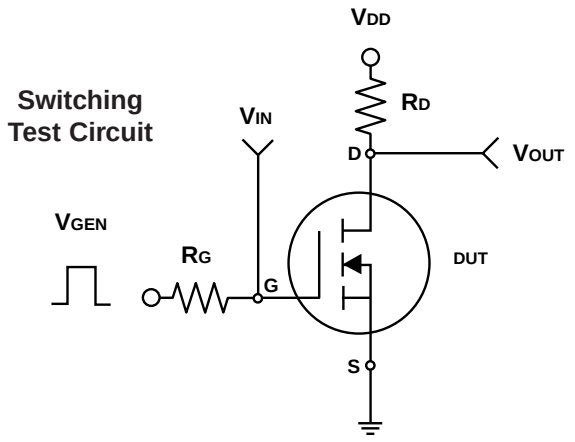

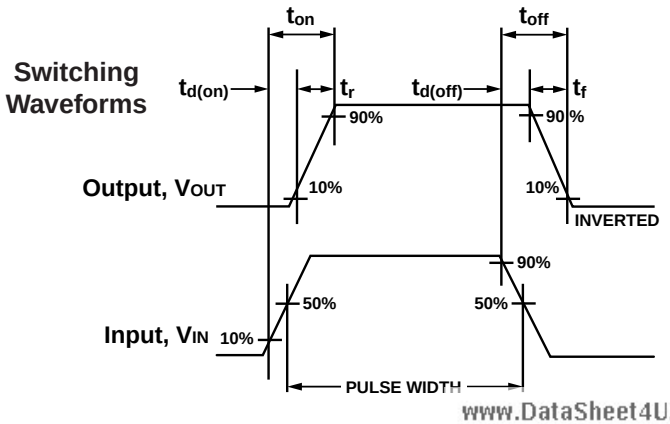

www.DataSheet4U.com

www.DataSheet4U.com

N-Channel Enhancement-Mode MOSFET

Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 – Output Characteristics

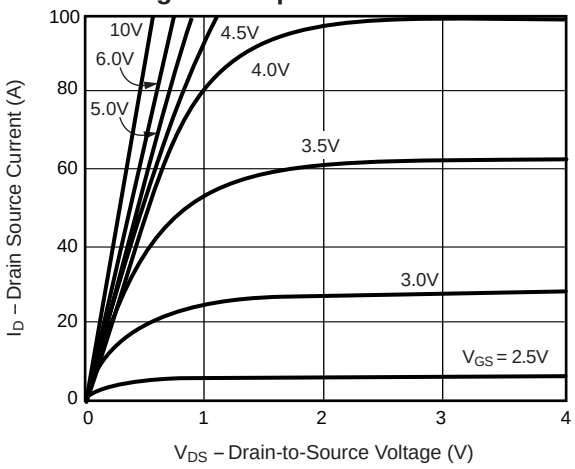

Fig. 2 – Transfer Characteristics

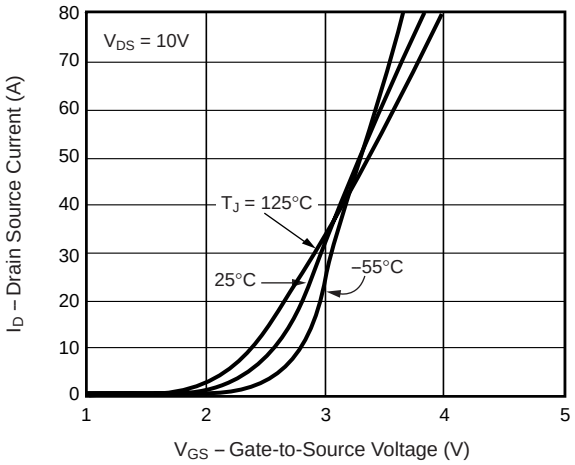

Fig. 3 – Threshold Voltage vs. Temperature

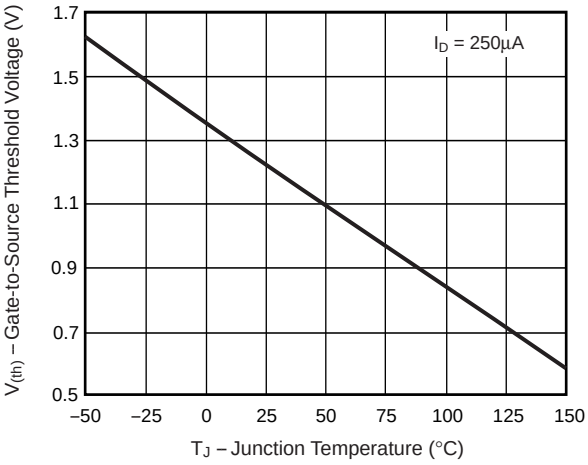

Fig. 4 – On-Resistance vs. Drain Current

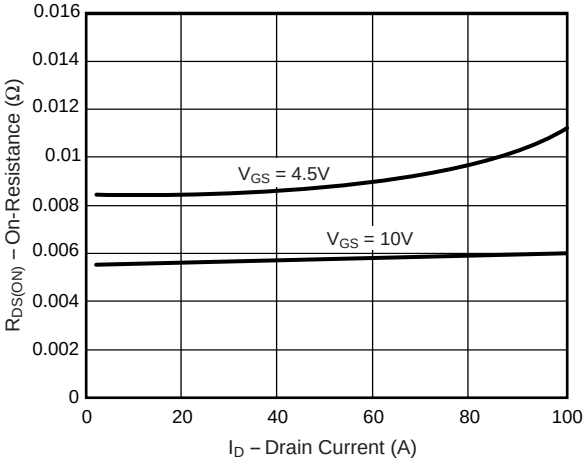

Fig. 5 – On-Resistance vs. Junction Temperature

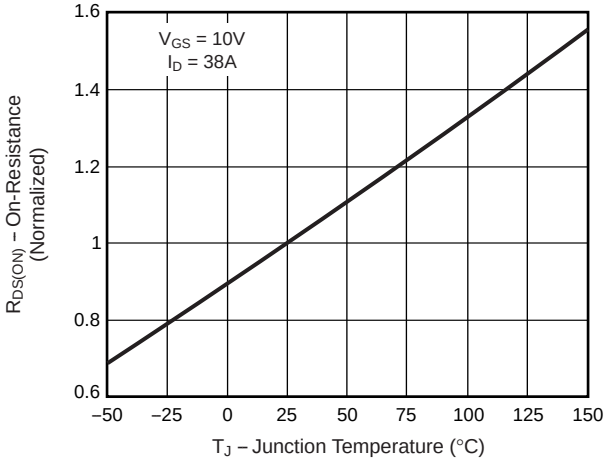

www.DataSheet4U.com

www.DataSheet4U.com

Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 6 – On-Resistance vs. Gate-to-Source Voltage

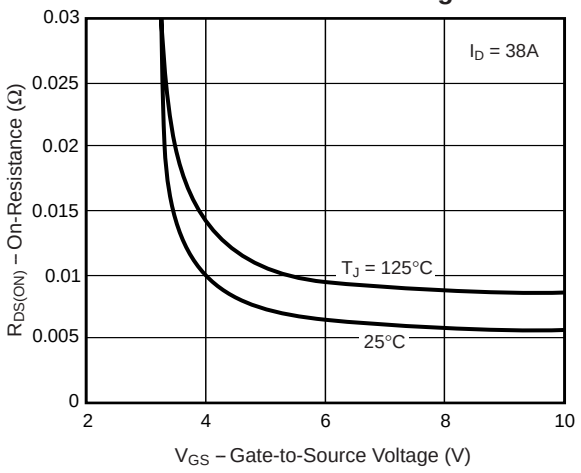

Fig. 7 – Gate Charge

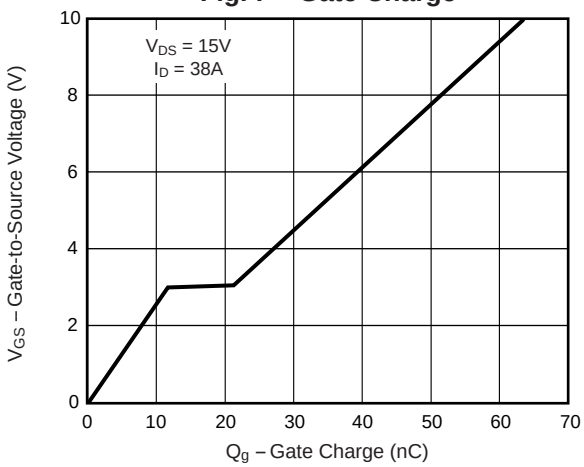

Fig. 8 – Capacitance

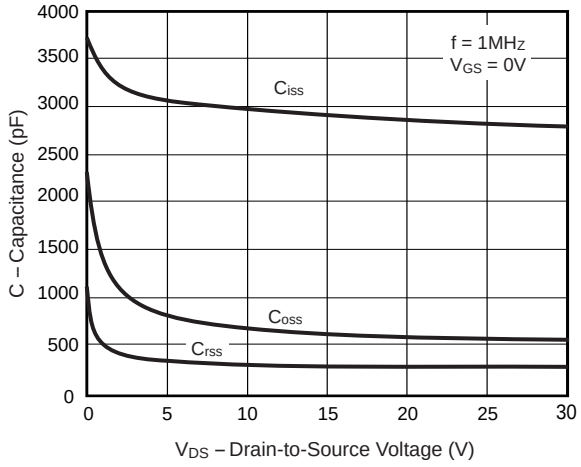

Fig. 9 – Source-Drain Diode Forward Voltage

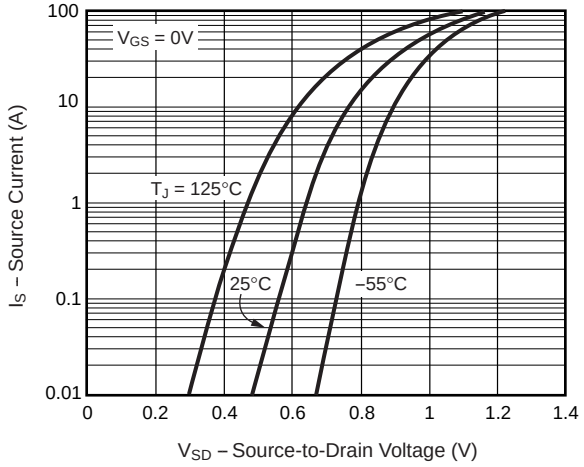

www.DataSheet4U.com

www.DataSheet4U.com

Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 10 – Breakdown Voltage vs. Junction Temperature

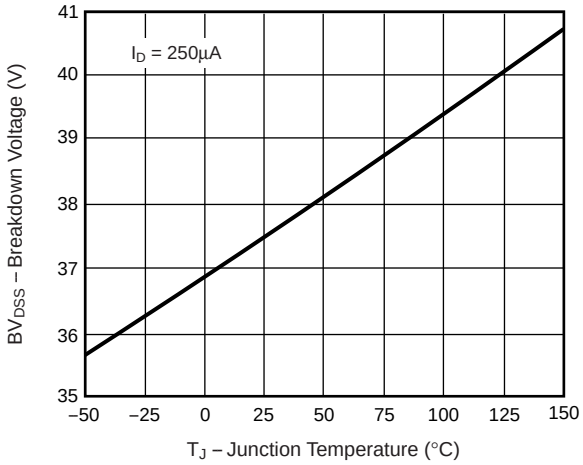

Fig. 11 – Transient Thermal Impedance

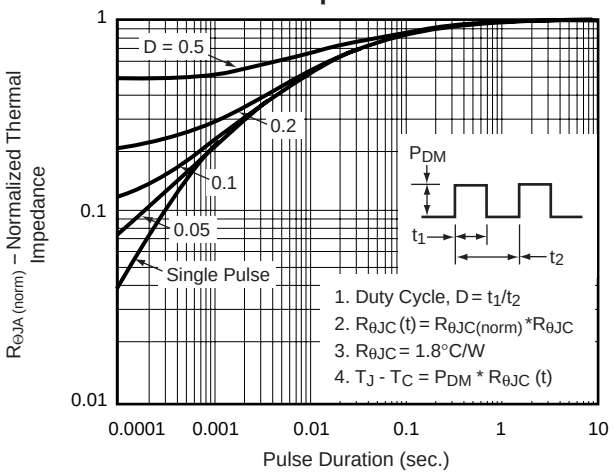

Fig. 12 – Power vs. Pulse Duration

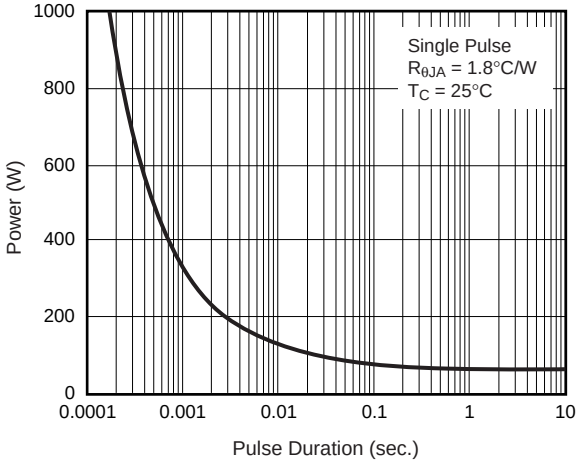

Fig. 13 – Maximum Safe Operating Area

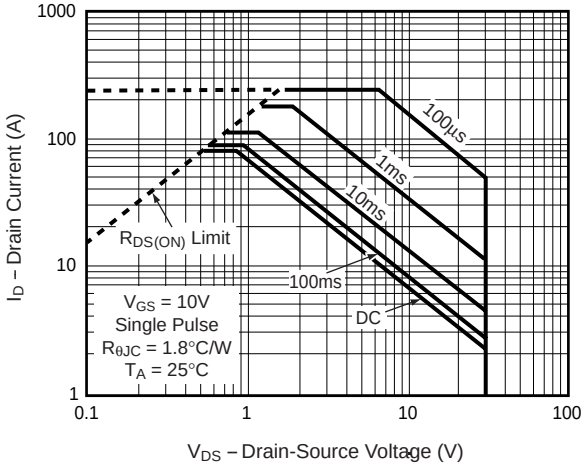

www.DataSheet4U.com