2SK3451-01MR

FUJI POWER MOSFET 200303

Super FAP-G Series

N-CHANNEL SILICON POWER MOSFET

■ Features

High speed switching
Low on-resistance
No secondary breadown
Low driving power
Avalanche-proof

■ Applications

Switching regulators
UPS (Uninterruptible Power Supply)
DC-DC converters

■ Outline Drawings [mm]

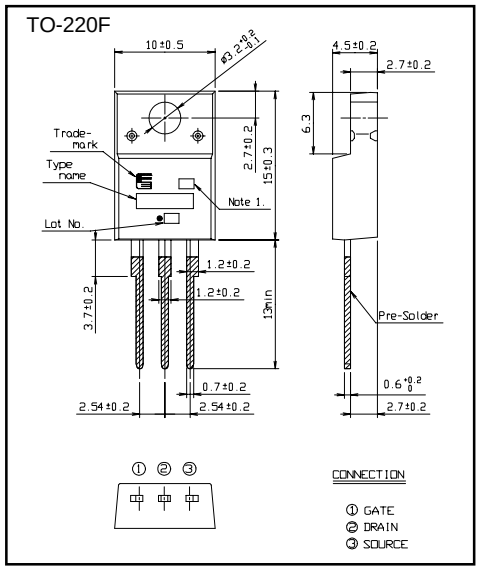

■ Equivalent circuit schematic

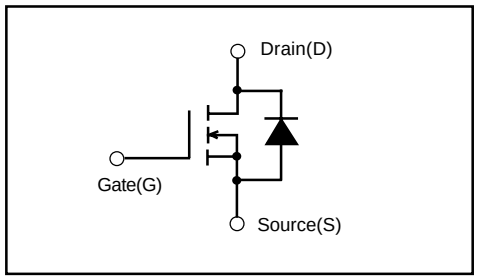

■ Maximum ratings and characteristic Absolute maximum ratings

● **(Tc=25°C unless otherwise specified)**

Item	Symbol		Ratings	Unit
Drain-source voltage	V_{DS}		600	V
Continuous drain current	I_D		±13	A
Pulsed drain current	$I_{D(puls)}$		±52	A
Gate-source voltage	V_{GS}		±30	V
Repetitive or non-repetitive	I_{AR} *2		13	A
Maximum Avalanche Energy	E_{AS} *1		216.7	mJ
Maximum Drain-Source dV/dt	dV_{DS}/dt		20	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3		5	kV/μs
Max. power dissipation	P_D	Ta=25°C	2.16	W
		Tc=25°C	80	
Operating and storage temperature range	T_{ch}		+150	°C
	T_{stg}		-55 to +150	°C
Isolation Voltage	V_{ISO} *4		2	kVrms

*1 L=2.36mH, Vcc=60V, See to Avalanche Energy Graph *2 Tch≦150°C

*3 I_F≦-I_D, -di/dt=50A/μs, Vcc≦BV_{DSS}, Tch≦150°C *4 t=60sec, f=60Hz

● **Electrical characteristics (T_C =25°C unless otherwise specified)**

Item	Symbol	Test Conditions		Min.	Typ.	Max.	Units
Drain-source breakdown voltaget	$V_{(BR)DSS}$	I_D=250μA V_{GS}=0V		600			V
Gate threshold voltage	$V_{GS(th)}$	I_D= 250μA V_{DS}=V_{GS}		3.0		5.0	V
Zero gate voltage drain current	I_{DSS}	V_{DS}=600V V_{GS}=0V	Tch=25°C			25	μA
		V_{DS}=480V V_{GS}=0V	Tch=125°C			250	
Gate-source leakage current	I_{GSS}	V_{GS}=±30V V_{DS}=0V			10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	I_D=6A V_{GS}=10V			0.50	0.65	Ω
Forward transcondutance	g_{fs}	I_D=6A V_{DS}=25V		5.5	11		S
Input capacitance	C_{iss}	V_{DS}=25V			1600	2400	pF
Output capacitance	C_{oss}	V_{GS}=0V			160	240	
Reverse transfer capacitance	C_{rss}	f=1MHz			7	10.5	
Turn-on time t_{on}	$t_{d(on)}$	V_{CC}=300V I_D=6A			18	27	ns
	t_r	V_{GS}=10V			16	24	
Turn-off time t_{off}	$t_{d(off)}$	R_{GS}=10 Ω			35	50	
	t_f				8	15	
Total Gate Charge	Q_G	V_{CC}=300V			34	51	nC
Gate-Source Charge	Q_{GS}	I_D=12A			12.5	19	
Gate-Drain Charge	Q_{GD}	V_{GS}=10V			11.5	17.5	
Avalanche capability	I_{AV}	L=2.36mH Tch=25°C		13			A
Diode forward on-voltage	V_{SD}	I_F=12A V_{GS}=0V Tch=25°C			1.00	1.50	V
Reverse recovery time	t_{rr}	I_F=12A V_{GS}=0V			0.75		μs
Reverse recovery charge	Q_{rr}	-di/dt=100A/μs Tch=25°C			6.5		μC

● **Thermalcharacteristics**

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(ch-c)}$	channel to case			1.56	°C/W
	$R_{th(ch-a)}$	channel to ambient			58.0	°C/W

Characteristics

Allowable Power Dissipation
PD=f(Tc)

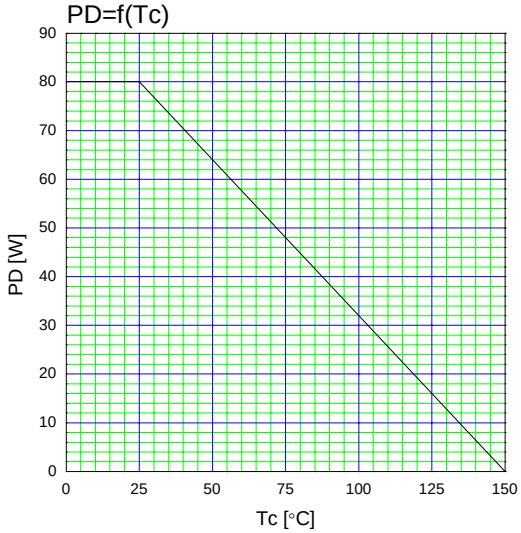

Maximum Avalanche Energy vs. starting Tch
E_{AS}=f(starting Tch):Vcc=60V

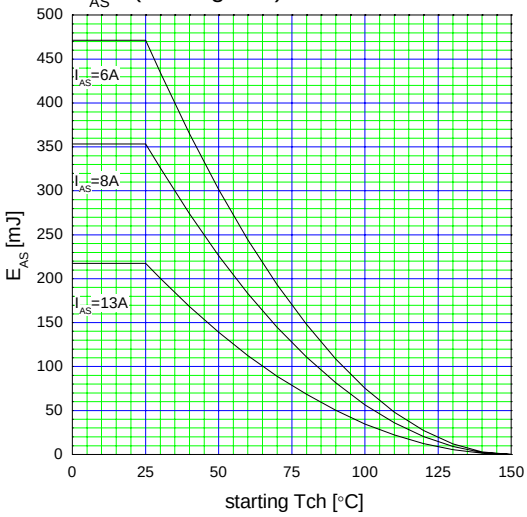

Typical Output Characteristics
ID=f(VDS):80µs Pulse test,Tch=25°C

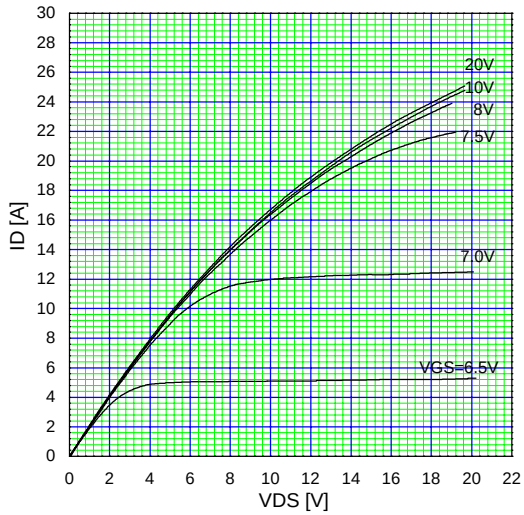

Typical Transfer Characteristic
ID=f(VGS):80µs Pulse test, VDS=25V,Tch=25°C

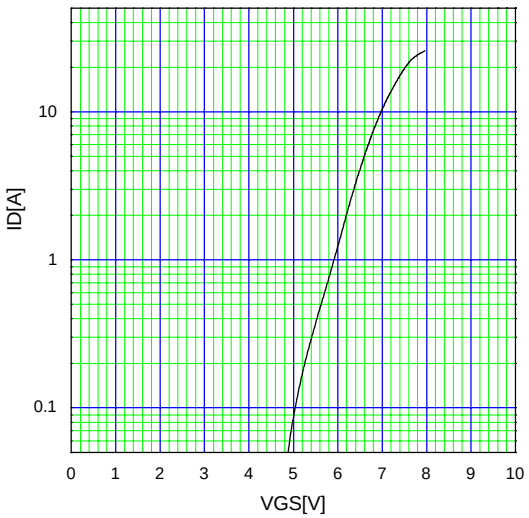

Typical Transconductance
gfs=f(ID):80µs Pulse test, VDS=25V,Tch=25°C

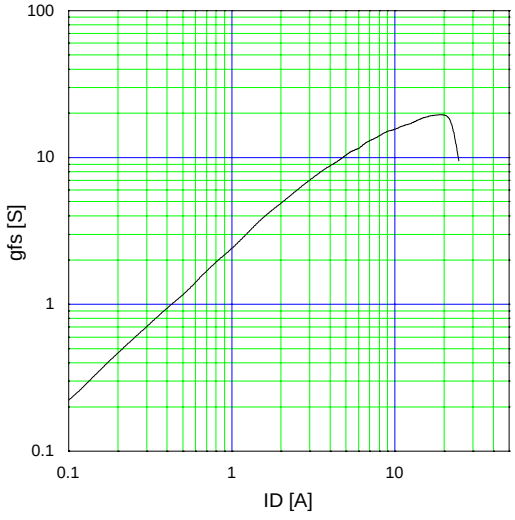

Typical Drain-Source on-state Resistance
RDS(on)=f(ID):80µs Pulse test, Tch=25°C

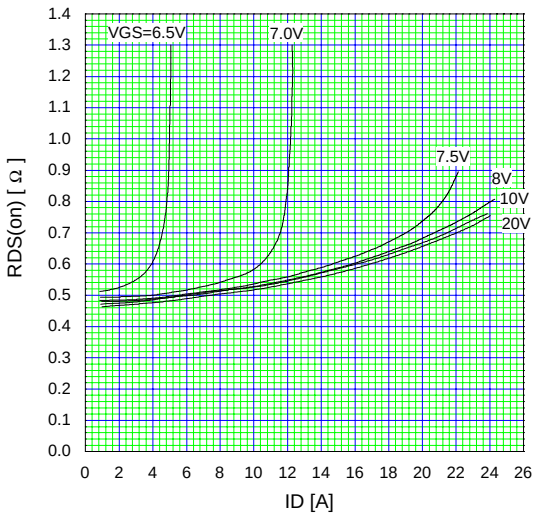

Drain-Source On-state Resistance
RDS(on)=f(Tch):ID=6A,VGS=10V

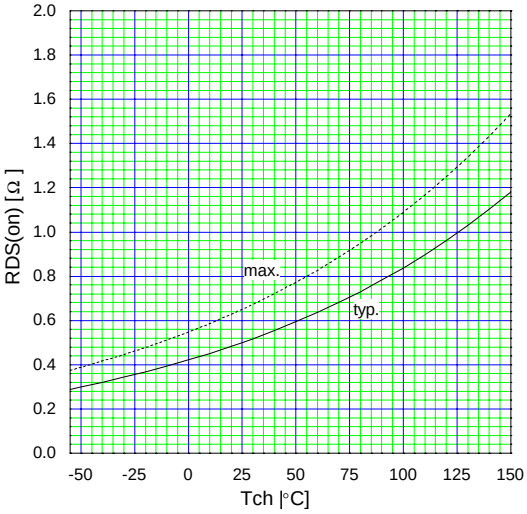

Gate Threshold Voltage vs. Tch
VGS(th)=f(Tch):VDS=VGS,ID=1mA

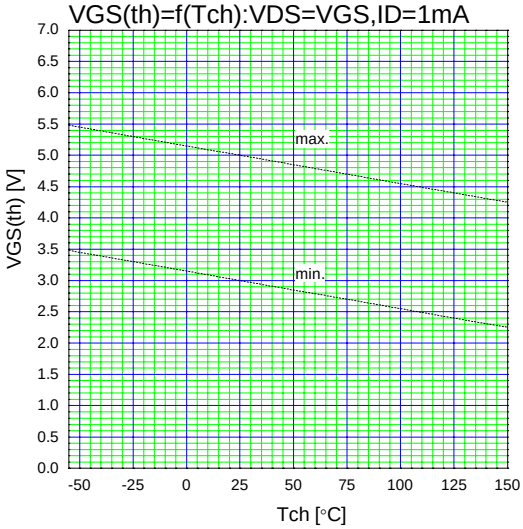

Typical Gate Charge Characteristics
VGS=f(Qg):ID=12A, Tch=25°C

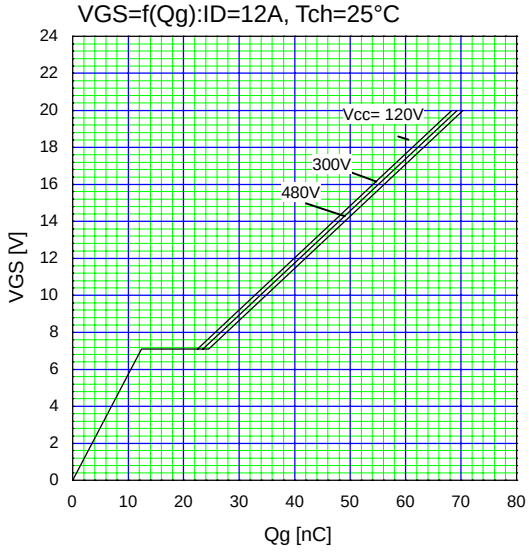

Typical Capacitance
C=f(VDS):VGS=0V,f=1MHz

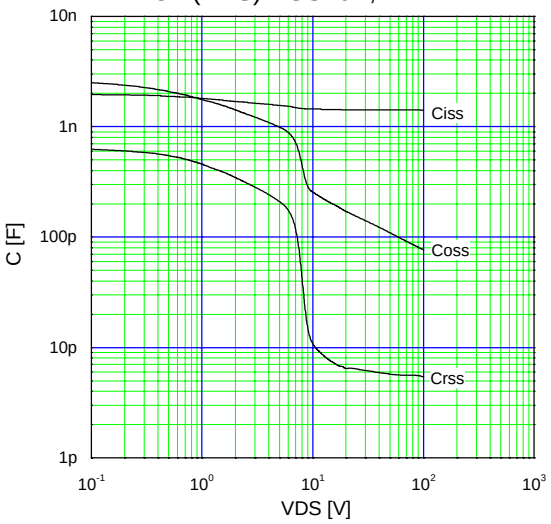

Typical Forward Characteristics of Reverse Diode
IF=f(VSD):80µs Pulse test,Tch=25°C

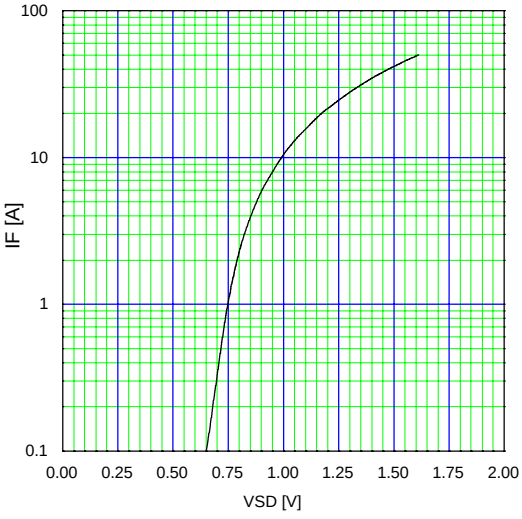

Typical Switching Characteristics vs. ID
t=f(ID):Vcc=300V, VGS=10V, RG=10Ω

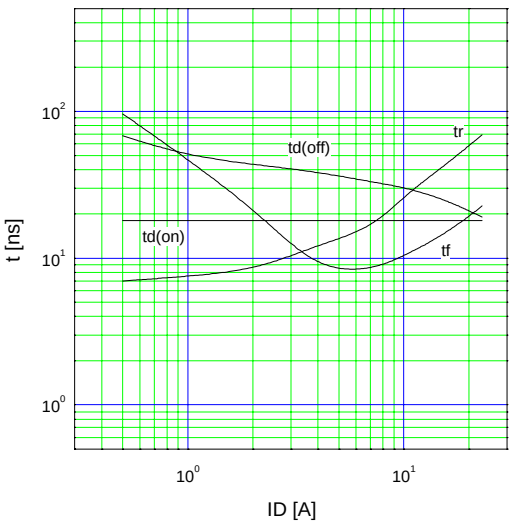

Maximum Transient Thermal Impedance
Zth(ch-c)=f(t):D=0

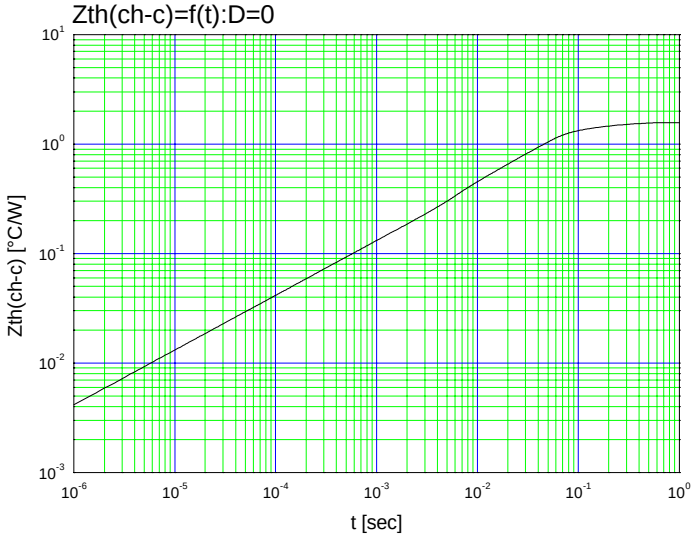

Maximum Avalanche Current vs Pulse width
I_{AV}=f(t_{AV}):starting Tch=25°C,Vcc=60V

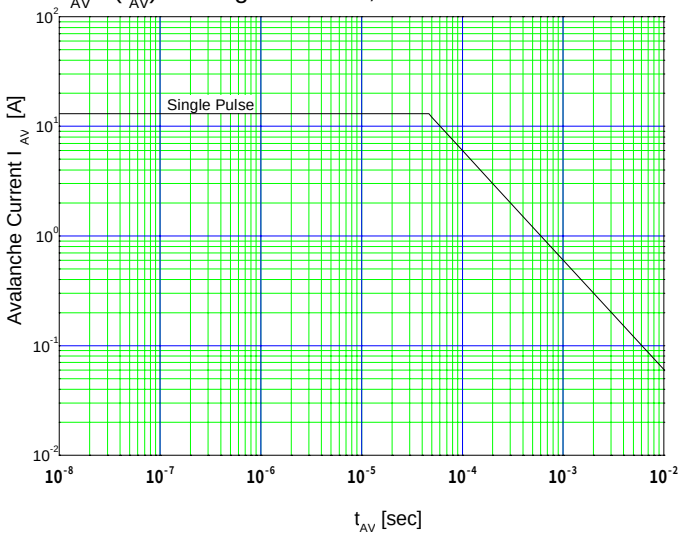

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company